

Adwa Alnizk Co

**Import and wholesales of
Household and Electric
Equipment & Material**

S.M.C

Mohamed Mokhtar Alati

Chairman

Souq Al Kremia-Alswani Road – Tripoli - Libya

+218 93 007 7114

+218 91 470 0030

أضواء النيزك

@ alatim704@gmail.com

+218 91 321 6913

+218 91 321 6913

+218 91 321 6913

+218 91 521 6913



S.M.C

شركة أضواء النيزك

نحن العلامة التجارية الرائدة في السوق
الليبي التي تقدم أفضل المنتجات جودة.

ALNIZK

Adwa Alnizk Co

Import and wholesales of
Household and Electric
Equipment & Material

S.M.C

Mohamed Mokhtar Alati
Chairman

Souq Al Kremia-Alswani Road – Tripoli - Libya

+218 93 007 7114

+218 91 321 6913

+218 91 470 0030





+218 91 321 6913

أضواء النيزك

+218 91 321 6913

@ alatim704@gmail.com

+218 91 521 6913



LED DOWN LIGHT

01-22



LED PANEL LIGHT

23-40



LED SPOT LIGHT

41-50



UFO HIGH BAYLIGHT

51-53



LED FLOOD LIGHT

54-56



LED STREET LIGHT

57-58



MAGNETIC TRACK LIGHT

59-66



LED POWER SUPPLY

67-68



LED ALUMINUM PROFILE

69-70



LED BULKHEAD LIGHT

71-72





LED BLUB

73-76



COB DOWN LIGHT



Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported PC material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-216-90	AC85-265V	7W	Φ 90mm	Φ 75mm	80-90LM/W		Aluminum
OS-216-130	AC85-265V	10W	Φ 130mm	Φ 105mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-216-165	AC85-265V	15W	Φ 165mm	Φ 145mm	80-90LM/W		Aluminum
OS-216-190	AC85-265V	20W	Φ 190mm	Φ 175mm	80-90LM/W		Aluminum
OS-216-220	AC85-265V	30W	Φ 220mm	Φ 200mm	80-90LM/W		Aluminum

SMD DOWN LIGHT




Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported PC material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-988A/OS-988B	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-988A/OS-988B	AC85-265V	10W	Φ 125mm	Φ 95mm	80-90LM/W		Aluminum
OS-988A/OS-988B	AC85-265V	15W	Φ 170mm	Φ 140mm	80-90LM/W		Aluminum
OS-988A/OS-988B	AC85-265V	30W	Φ 225mm	Φ 190mm	80-90LM/W		Aluminum

COB DOWN LIGHT



Product features

- After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- Imported PC material, good toughness and high strength;
- The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL966-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W		Aluminum
OS-DL966-130	AC85-265V	10W	Φ 128mm	Φ 100mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-DL966-165	AC85-265V	20W	Φ 165mm	Φ 140mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-DL966-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum
OS-DL966-230	AC85-265V	60W	Φ 230mm	Φ 200mm	80-90LM/W		Aluminum

SMD DOWN LIGHT



Product features

- After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- Imported PC material, good toughness and high strength;
- The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-988-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-988-125	AC85-265V	10W	Φ 125mm	Φ 95mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-988-170	AC85-265V	15W	Φ 170mm	Φ 140mm	80-90LM/W		Aluminum
OS-988-225	AC85-265V	30W	Φ 225mm	Φ 190mm	80-90LM/W		Aluminum

LED PANEL LIGHT



Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported P.C material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-PL096-120	AC85-265V	12W	Φ 120mm	80-90LM/W	2700K	Aluminum
OS-PL096-170	AC85-265V	18W	Φ 170mm	80-90LM/W	3000K	Aluminum
OS-PL096-220	AC85-265V	30W	Φ 225mm	80-90LM/W	3500K	Aluminum
OS-PL096-300	AC85-265V	36W	Φ 300mm	80-90LM/W	4000K	Aluminum
					5000K	
					6500K	
					8000K	

LED PANEL LIGHT



Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported P.C material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-0013/OS-0014	AC85-265V	18W	Φ 170x40mm	80-90LM/W	2700K 5000K	Aluminum
OS-0013/OS-0014	AC85-265V	30W	Φ 225x40mm	80-90LM/W	3000K 6500K	Aluminum
OS-0013/OS-0014	AC85-265V	40W	Φ 300x50mm	80-90LM/W	3500K 8000K	Aluminum
					4000K	

LED PANEL LIGHT



Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported PC material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-PL077-90	AC85-265V	10W	Φ 90mm	50-75mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-PL077-120	AC85-265V	18W	Φ 120mm	50-110mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-PL077-175	AC85-265V	24W	Φ 175mm	50-155mm	80-90LM/W		Aluminum
OS-PL077-220	AC85-265V	36W	Φ 225mm	50-205mm	80-90LM/W		Aluminum

LED PANEL LIGHT





Product features

- ◆ After oxidation treatment, the lamp body is resistant to pressure, abrasion, corrosion and discoloration;
- ◆ The lamp beads adopt ultra-high brightness imported chips, full-automatic packaging technology, high stability, small light attenuation, good color rendering and high light efficiency;
- ◆ Imported PC material, good toughness and high strength;
- ◆ The reflector adopts imported high-purity aluminum material, with high reflection efficiency and no oxidation and fading




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-PL041-90	AC85-265V	10W	Φ 90mm	50-75mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-PL041-120	AC85-265V	18W	Φ 120mm	50-110mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-PL041-175	AC85-265V	24W	Φ 175mm	50-155mm	80-90LM/W		Aluminum
OS-PL041-220	AC85-265V	36W	Φ 225mm	50-205mm	80-90LM/W		Aluminum

COB DOWN LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL005S-100	AC85-265V	7W	Φ 100mm	Φ 70mm	80-90LM/W	2700K	IRON
OS-DL005S-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	IRON
OS-DL005S-170	AC85-265V	18W	Φ 170mm	Φ 140mm	80-90LM/W	3500K	IRON
OS-DL005S-230	AC85-265V	30W	Φ 230mm	Φ 200mm	80-90LM/W	4000K	IRON
						5000K	IRON
						6500K	IRON
						8000K	IRON




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL986-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL986-130	AC85-265V	10W	Φ 128mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL986-165	AC85-265V	20W	Φ 165mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL986-165	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	4000K	Aluminum
OS-DL986-225	AC85-265V	60W	Φ 230mm	Φ 200mm	80-90LM/W	5000K	Aluminum
						6500K	Aluminum
						8000K	Aluminum

SMD DOWN LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL005-100	AC85-265V	7W	Φ 100mm	Φ 70mm	80-90LM/W	2700K	IRON
OS-DL005-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	IRON
OS-DL005-170	AC85-265V	18W	Φ 170mm	Φ 140mm	80-90LM/W	3500K	IRON
OS-DL005-230	AC85-265V	30W	Φ 230mm	Φ 200mm	80-90LM/W	4000K	IRON
						5000K	IRON
						6500K	IRON
						8000K	IRON






Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DP-R05	AC85-265V	5W	Φ 90mm	Φ 70-80mm	80-90LM/W	2700K	Aluminum
OS-DP-R09	AC85-265V	9W	Φ 120mm	Φ 95-110mm	80-90LM/W	3000K	Aluminum
OS-DP-R12	AC85-265V	12W	Φ 150mm	Φ 120-140mm	80-90LM/W	3500K	Aluminum
OS-DP-R18	AC85-265V	18W	Φ 176mm	Φ 140-165mm	80-90LM/W	4000K	Aluminum
OS-DP-R24	AC85-265V	24W	Φ 220mm	Φ 200mm	80-90LM/W	5000K	Aluminum
						6500K	Aluminum
						8000K	Aluminum

COB DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL032A-90	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL032A-120	AC85-265V	10W	Φ 120mm	Φ 100mm	80-90LM/W		Aluminum
OS-DL032A-170	AC85-265V	15W	Φ 173mm	Φ 140mm	80-90LM/W		Aluminum
OS-DL032A-225	AC85-265V	30W	Φ 223mm	Φ 200mm	80-90LM/W		Aluminum
OS-DL032A-225	AC85-265V	36W	Φ 223mm	Φ 200mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL989C-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL989C-130	AC85-265V	10W	Φ 128mm	Φ 95mm	80-90LM/W		Aluminum
OS-DL989C-165	AC85-265V	15W	Φ 165mm	Φ 140mm	80-90LM/W		Aluminum
OS-DL989C-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum
OS-DL989C-225	AC85-265V	36W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum

SMD DOWN LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-HCLT20-9W	AC85-265V	9W	Φ 100mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-HCLT20-18W	AC85-265V	18W	Φ 120mm	Φ 95mm	80-90LM/W		Aluminum
OS-HCLT20-25W	AC85-265V	25W	Φ 140mm	Φ 145mm	80-90LM/W		Aluminum
OS-HCLT20-40W	AC85-265V	40W	Φ 225mm	Φ 195mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL969-95	AC85-265V	9W	Φ 95mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL969-130	AC85-265V	12W	Φ 130mm	Φ 110mm	80-90LM/W		Aluminum
OS-DL969-165	AC85-265V	18W	Φ 165mm	Φ 140mm	80-90LM/W		Aluminum
OS-DL969-225	AC85-265V	36W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum

COB DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL961-85	AC85-265V	7W	Φ 85x40mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-DL961-125	AC85-265V	10W	Φ 125x47mm	Φ 100mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-DL961-165	AC85-265V	15W	Φ 165x53mm	Φ 145mm	80-90LM/W		Aluminum
OS-DL961-225	AC85-265V	30W	Φ 225x58mm	Φ 200mm	80-90LM/W		Aluminum

SMD DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL962-85	AC85-265V	7W	Φ 85x40mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-DL962-125	AC85-265V	10W	Φ 125x47mm	Φ 100mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-DL962-165	AC85-265V	15W	Φ 165x53mm	Φ 145mm	80-90LM/W		Aluminum
OS-DL962-225	AC85-265V	30W	Φ 225x58mm	Φ 200mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light ef ect	Color temperature	Material
OS-DL964-110	AC85-265V	7W	Φ 110x50mm	Φ 90mm	80-90LM/W		Aluminum
OS-DL964-135	AC85-265V	10W	Φ 135x60mm	Φ 115mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-DL964-162	AC85-265V	15W	Φ 162x65mm	Φ 142mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-DL964-192	AC85-265V	20W	Φ 192x75mm	Φ 172mm	80-90LM/W		Aluminum
OS-DL964-225	AC85-265V	30W	Φ 225x85mm	Φ 205mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL055 SMD 7W	AC85-265V	7W	Φ 82x38mm	Φ 75mm	80-90LM/W		Aluminum
OS-DL055 SMD 10W	AC85-265V	10W	Φ 103x42mm	Φ 95mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-DL055 SMD 15W	AC85-265V	15W	Φ 130x45mm	Φ 120mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-DL055 SMD 20W	AC85-265V	20W	Φ 160x40mm	Φ 140mm	80-90LM/W		Aluminum
OS-DL055 SMD 30W	AC85-265V	30W	Φ 230x40mm	Φ 200mm	80-90LM/W		Aluminum

COB DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL003-90	AC85-265V	7W	Φ 95mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL003-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W		Aluminum
OS-DL003-165	AC85-265V	15W	Φ 162mm	Φ 135mm	80-90LM/W		Aluminum
OS-DL003-195	AC85-265V	20W	Φ 185mm	Φ 170mm	80-90LM/W		Aluminum
OS-DL003-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL003P-90	AC85-265V	7W	Φ 90mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL003P-130	AC85-265V	10W	Φ 130mm	Φ 105mm	80-90LM/W		Aluminum
OS-DL003P-165	AC85-265V	15W	Φ 165mm	Φ 148mm	80-90LM/W		Aluminum
OS-DL003P-220	AC85-265V	30W	Φ 220mm	Φ 200mm	80-90LM/W		Aluminum

SMD DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL001-100	AC85-265V	7W	Φ 100mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-BL001-120	AC85-265V	12W	Φ 120mm	Φ 95mm	80-90LM/W		Aluminum
OS-BL001-165	AC85-265V	18W	Φ 170mm	Φ 145mm	80-90LM/W		Aluminum
OS-BL001-220	AC85-265V	30W	Φ 230mm	Φ 200mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL006-90	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-BL006-120	AC85-265V	9W	Φ 100mm	Φ 85mm	80-90LM/W		Aluminum
OS-BL006-145	AC85-265V	12W	Φ 130mm	Φ 100mm	80-90LM/W		Aluminum
OS-BL006-175	AC85-265V	18W	Φ 170mm	Φ 140mm	80-90LM/W		Aluminum
OS-BL006-220	AC85-265V	30W	Φ 230mm	Φ 200mm	80-90LM/W		Aluminum

COB DOWN LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL006-90	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL006-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL006-165	AC85-265V	15W	Φ 165mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL006-220	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	4000K	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL968-90	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL968-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL968-165	AC85-265V	15W	Φ 165mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL968-165	AC85-265V	20W	Φ 165mm	Φ 140mm	80-90LM/W	4000K	Aluminum
OS-DL968-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	5000K	Aluminum

COB DOWN LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL019-230	AC85-265V	60W	Φ 230mm	Φ 200mm	80-90LM/W	2700K 5000K	Aluminum
OS-DL020-230	AC85-265V	80W	Φ 230mm	Φ 200mm	80-90LM/W	3000K 6500K	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL050-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL050-120	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL050-170	AC85-265V	20W	Φ 165mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL050-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	4000K	Aluminum
OS-DL050-230	AC85-265V	60W	Φ 225mm	Φ 200mm	80-90LM/W	5000K	Aluminum

COB DOWN LIGHT


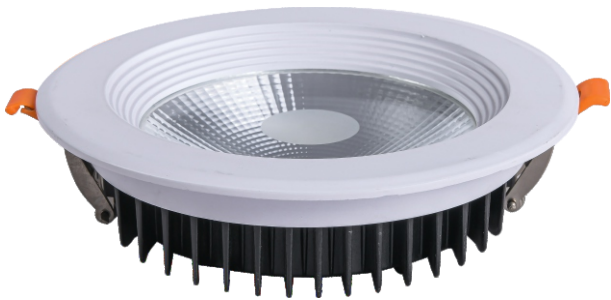


Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL027-7W	AC85-265V	7W	Φ 100mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL027-10W	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL027-15W	AC85-265V	15W	Φ 180mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL027-30W	AC85-265V	30W	Φ 230mm	Φ 200mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL969A-95	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W		Aluminum
OS-DL969A-130	AC85-265V	10W	Φ 128mm	Φ 100mm	80-90LM/W	2700K	Aluminum
OS-DL969A-165	AC85-265V	20W	Φ 165mm	Φ 140mm	80-90LM/W	3000K	Aluminum
OS-DL969A-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	3500K	Aluminum
OS-DL969A-230	AC85-265V	60W	Φ 230mm	Φ 200mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	

COB DOWN LIGHT

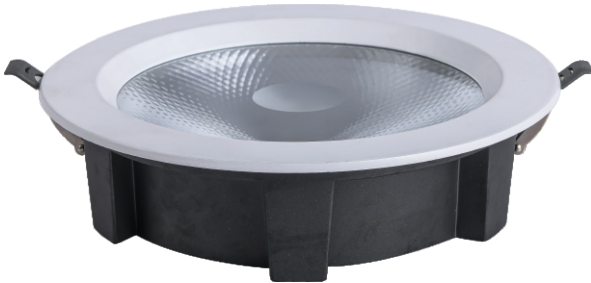

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL036A-90	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K	Aluminum
OS-DL036A-120	AC85-265V	10W	Φ 120mm	Φ 100mm	80-90LM/W	3000K	Aluminum
OS-DL036A-170	AC85-265V	15W	Φ 173mm	Φ 140mm	80-90LM/W	3500K	Aluminum
OS-DL036A-220	AC85-265V	30W	Φ 223mm	Φ 200mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL015-90	AC85-265V	7W	Φ 95mm	Φ 70mm	80-90LM/W		Aluminum
OS-DL015-120	AC85-265V	10W	Φ 128mm	Φ 100mm	80-90LM/W	2700K	Aluminum
OS-DL015-170	AC85-265V	15W	Φ 165mm	Φ 140mm	80-90LM/W	3000K	Aluminum
OS-DL015-225	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W	3500K	Aluminum
OS-DL015-230	AC85-265V	50W	Φ 225mm	Φ 200mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	

COB DOWN LIGHT





Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL002-90	AC85-265V	7W	Φ 90mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL002-130	AC85-265V	10W	Φ 130mm	Φ 105mm	80-90LM/W		Aluminum
OS-DL002-165	AC85-265V	15W	Φ 165mm	Φ 148mm	80-90LM/W		Aluminum
OS-DL002-190	AC85-265V	20W	Φ 190mm	Φ 160mm	80-90LM/W		Aluminum
OS-DL002-220	AC85-265V	30W	Φ 220mm	Φ 200mm	80-90LM/W		Aluminum





Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL016-90	AC85-265V	7W	Φ 100mm	Φ 70mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL016-130	AC85-265V	10W	Φ 130mm	Φ 100mm	80-90LM/W		Aluminum
OS-DL016-165	AC85-265V	15W	Φ 165mm	Φ 140mm	80-90LM/W		Aluminum
OS-DL016-220	AC85-265V	30W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum

COB DOWN LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL026-25W	AC85-265V	25W	Φ 165mm	Φ 155mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-DL026-50W	AC85-265V	50W	Φ 225mm	Φ 200mm	80-90LM/W		Aluminum

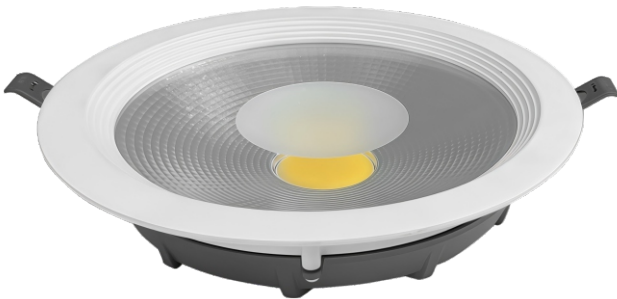

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL962-85	AC85-265V	7W	Φ 85x40mm	Φ 75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	Aluminum
OS-DL962-125	AC85-265V	10W	Φ 125x47mm	Φ 100mm	80-90LM/W		Aluminum
OS-DL962-165	AC85-265V	15W	Φ 165x53mm	Φ 145mm	80-90LM/W		Aluminum
OS-DL962-225	AC85-265V	30W	Φ 225x58mm	Φ 200mm	80-90LM/W		Aluminum

LED PANEL LIGHT



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-PL095-120	AC85-265V	20W	Φ 120mm	80-90LM/W	2700K	Aluminum
OS-PL095-170	AC85-265V	30W	Φ 170mm	80-90LM/W	3000K	Aluminum
OS-PL095-220	AC85-265V	40W	Φ 225mm	80-90LM/W	3500K	Aluminum
OS-PL095-300	AC85-265V	50W	Φ 300mm	80-90LM/W	4000K	Aluminum
					5000K	
					6500K	
					8000K	





Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-GL001-120	AC85-265V	7W	Φ 120mm	Φ 95mm	80-90LM/W	2700K	Aluminum+Glass
OS-GL001-160	AC85-265V	10W	Φ 160mm	Φ 125mm	80-90LM/W	3000K	Aluminum+Glass
OS-GL001-200	AC85-265V	15W	Φ 200mm	Φ 165mm	80-90LM/W	3500K	Aluminum+Glass
OS-GL001-240	AC85-265V	25W	Φ 240mm	Φ 205mm	80-90LM/W	4000K	Aluminum+Glass
						5000K	
						6500K	
						8000K	

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-PFL039-90	AC85-265V	10W	Φ 90mm	50-75mm	80-90LM/W	2700K	Aluminum
OS-PFL039-120	AC85-265V	18W	Φ 120mm	50-110mm	80-90LM/W	3000K	Aluminum
OS-PFL039-175	AC85-265V	24W	Φ 175mm	50-155mm	80-90LM/W	3500K	Aluminum
OS-PFL039 -220	AC85-265V	36W	Φ 225mm	50-205mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	

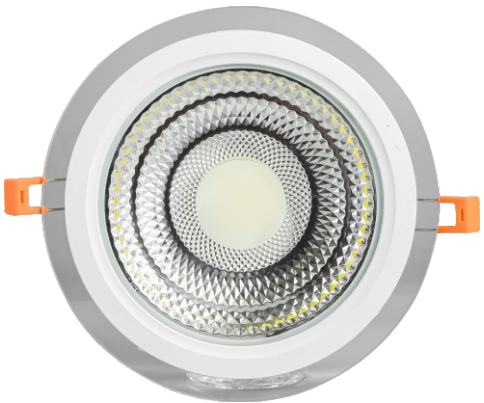

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-GL001-120	AC85-265V	7W	Φ 120mm	Φ 95mm	80-90LM/W	2700K	Aluminum+Glass
OS-GL001-160	AC85-265V	10W	Φ 160mm	Φ 125mm	80-90LM/W	3000K	Aluminum+Glass
OS-GL001-200	AC85-265V	15W	Φ 200mm	Φ 165mm	80-90LM/W	3500K	Aluminum+Glass
OS-GL001-240	AC85-265V	25W	Φ 240mm	Φ 205mm	80-90LM/W	4000K	Aluminum+Glass
						5000K	
						6500K	
						8000K	

LED PANEL LIGHT




Model	Voltage	Power	Diameter Size	Light effect	Color temperature	CRI	Material
OS-J300*300	AC85-265V	18W	300*300mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-J300*300	AC85-265V	20W	300*300mm	80-90LM/W		> 80	Aluminum
OS-J300*600	AC85-265V	18W	300*600mm	80-90LM/W		> 80	Aluminum
OS-J300*600	AC85-265V	24W	300*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	32W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	F38W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	38W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	42W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	48W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	64W	600*600mm	80-90LM/W		> 80	Aluminum
OS-J600*600	AC85-265V	78W	600*600mm	80-90LM/W	7000K	> 80	Aluminum
OS-J300*1200	AC85-265V	38W	300*1200mm	80-90LM/W		> 80	Aluminum
OS-J300*1200	AC85-265V	48W	300*1200mm	80-90LM/W		> 80	Aluminum
OS-J600*1200	AC85-265V	60W	600*1200mm	80-90LM/W		> 80	Aluminum
OS-J600*1200	AC85-265V	72W	600*1200mm	80-90LM/W		> 80	Aluminum

LED PANEL LIGHT



Model	Voltage	Size	Power	Light effect	Color temperature	CRI	Material
OS-PL002F-120	AC85-265V	120*120mm	6W	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-PL002F-170	AC85-265V	170*170mm	12W	80-90LM/W		> 80	Aluminum
OS-PL002F-225	AC85-265V	225*225mm	18W	80-90LM/W		> 80	Aluminum
OS-PL002F-300	AC85-265V	300*300mm	30W	80-90LM/W		> 80	Aluminum
OS-PL002F-300*600	AC85-265V	Φ300*600mm	24W	80-90LM/W		> 80	Aluminum
OS-PL002F-400	AC85-265V	Φ400*400mm	36W	80-90LM/W		> 80	Aluminum
OS-PL002F-500	AC85-265V	Φ500*500mm	36W	80-90LM/W		> 80	Aluminum
OS-PL002F-600	AC85-265V	Φ600*600mm	48W	80-90LM/W		> 80	Aluminum




Model	Voltage	Size	Power	Light effect	Color temperature	CRI	Material
OS-P600X600	AC85-265V	600x600x26mm	96W	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	> 80	Aluminum



LED PANEL LIGHT



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-BL013-120	AC85-265V	10W	Φ 120mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-BL013-170	AC85-265V	18W	Φ 170mm	80-90LM/W		Aluminum
OS-BL013-220	AC85-265V	36W	Φ 220mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-SF003-170	AC85-265V	18W	Φ 172x40mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-SF003-225	AC85-265V	24W	Φ 225x40mm	80-90LM/W		Aluminum
OS-SF003-300	AC85-265V	36W	Φ 300x40mm	80-90LM/W		Aluminum

LED PANEL LIGHT



Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-SF007-120	AC85-265V	18W	Φ120mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 7000K 4000K	>80	Aluminum
OS-SF007-170	AC85-265V	24W	Φ170mm	80-90LM/W		>80	Aluminum
OS-SF007-220	AC85-265V	36W	Φ220mm	80-90LM/W		>80	Aluminum
OS-SF007-300	AC85-265V	48W	Φ300mm	80-90LM/W		>80	Aluminum



Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-BL007-120	AC85-265V	18W	Φ120mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 7000K 4000K	>80	Aluminum
OS-BL007-170	AC85-265V	24W	Φ170mm	80-90LM/W		>80	Aluminum
OS-BL007-220	AC85-265V	36W	Φ220mm	80-90LM/W		>80	Aluminum
OS-BL007-300	AC85-265V	48W	Φ300mm	80-90LM/W		>80	Aluminum

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL003-100	AC85-265V	6W+6W	Φ 100mm	50-75mm	80-90LM/W	2700K	Aluminum
OS-BL003-120	AC85-265V	12W+12W	Φ 120mm	50-110mm	80-90LM/W	3000K	Aluminum
OS-BL003-170	AC85-265V	18W+18W	Φ 175mm	50-155mm	80-90LM/W	3500K	Aluminum
OS-BL003-220	AC85-265V	24W+24W	Φ 225mm	50-205mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL012-90	AC85-265V	10W	Φ 90mm	50-75mm	80-90LM/W	2700K	Aluminum
OS-BL012-120	AC85-265V	16W	Φ 120mm	50-110mm	80-90LM/W	3000K	Aluminum
OS-BL012-175	AC85-265V	22W	Φ 175mm	50-155mm	80-90LM/W	3500K	Aluminum
OS-BL012-225	AC85-265V	32W	Φ 225mm	50-205mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-PL001F-90	AC85-265V	3W	90*90mm	70*70mm	80-90LM/W		>80	Aluminum
OS-PL001F-120	AC85-265V	6W	120*120mm	100*100mm	80-90LM/W	2700K	>80	Aluminum
OS-PL001F-145	AC85-265V	9W	145*145mm	130*130mm	80-90LM/W	3000K	>80	Aluminum
OS-PL001F-170	AC85-265V	12W	170*170mm	155*155mm	80-90LM/W	3500K	>80	Aluminum
OS-PL001F-195	AC85-265V	15W	195*195mm	180*180mm	80-90LM/W	4000K	>80	Aluminum
OS-PL001F-220	AC85-265V	18W	220*220mm	205*205mm	80-90LM/W	5000K	>80	Aluminum
OS-PL001F-300	AC85-265V	24W	300*300mm	280*280mm	80-90LM/W	6500K	>80	Aluminum
						8000K		



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-PL001-90	AC85-265V	3W	Φ90mm	Φ70mm	80-90LM/W		>80	Aluminum
OS-PL001-120	AC85-265V	6W	Φ120mm	Φ100mm	80-90LM/W		>80	Aluminum
OS-PL001-145	AC85-265V	9W	Φ145mm	Φ130mm	80-90LM/W	2700K	>80	Aluminum
OS-PL001-160	AC85-265V	12W	Φ160mm	Φ140mm	80-90LM/W	3000K	>80	Aluminum
OS-PL001-170	AC85-265V	12W	Φ170mm	Φ155mm	80-90LM/W	3500K	>80	Aluminum
OS-PL001-195	AC85-265V	15W	Φ195mm	Φ180mm	80-90LM/W	4000K	>80	Aluminum
OS-PL001-220	AC85-265V	18W	Φ220mm	Φ205mm	80-90LM/W	5000K	>80	Aluminum
OS-PL001-300	AC85-265V	24W	Φ300mm	Φ280mm	80-90LM/W	6500K	>80	Aluminum
						8000K		

LED PANEL LIGHT

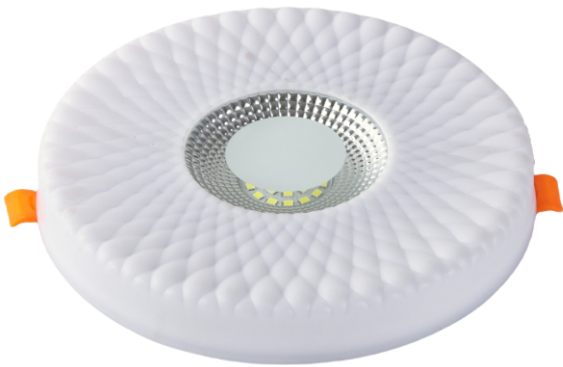


Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL017-100	AC85-265V	6W+6W	Φ 100mm	50-75mm	80-90LM/W	2700K	Aluminum
OS-BL017-120	AC85-265V	12W+12W	Φ 120mm	50-110mm	80-90LM/W	3000K	Aluminum
OS-BL017-170	AC85-265V	22W+22W	Φ 175mm	50-155mm	80-90LM/W	3500K	Aluminum
OS-BL017-220	AC85-265V	32W+32W	Φ 225mm	50-205mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-SF017-230	AC85-265V	30W	Φ 230x40mm	80-90LM/W	2700K	IRON
OS-SF017-300	AC85-265V	60W	Φ 300x40mm	80-90LM/W	3000K	
					5000K	
					6500K	
					8000K	

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SF019-120	AC85-265V	18W	Φ 120mm	Φ 100mm	80-90LM/W	2700K	Aluminum
OS-SF019-170	AC85-265V	24W	Φ 170mm	Φ 150mm	80-90LM/W	3000K	Aluminum
OS-SF019-220	AC85-265V	36W	Φ 220mm	Φ 200mm	80-90LM/W	3500K	Aluminum
OS-SF019-300	AC85-265V	48W	Φ 300mm	Φ 280mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SF005-120	AC85-265V	18W	Φ 120mm	Φ 100mm	80-90LM/W	2700K	Aluminum
OS-SF005-175	AC85-265V	24W	Φ 170mm	Φ 150mm	80-90LM/W	3000K	Aluminum
OS-SF005-225	AC85-265V	36W	Φ 220mm	Φ 200mm	80-90LM/W	3500K	Aluminum
OS-SF005-300	AC85-265V	48W	Φ 300mm	Φ 280mm	80-90LM/W	4000K	Aluminum
						5000K	
						6500K	
						8000K	

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-PL037	AC85-265V	7W	Φ 90mm	Φ 70mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum

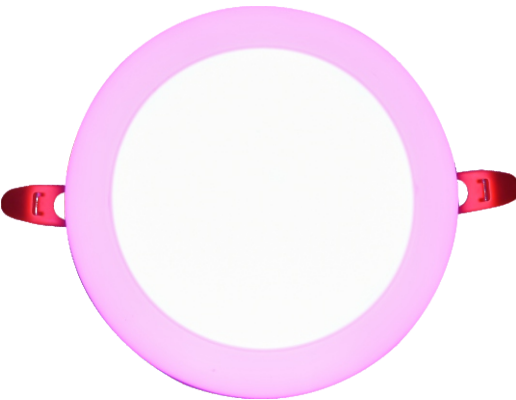

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-BL002-90	AC85-265V	10W	90mm	50-75mm	80-90LM/W		>80	Aluminum
OS-BL002-120	AC85-265V	18W	120mm	50-110mm	80-90LM/W	2700K 5000K 3000K 6500K	>80	Aluminum
OS-BL002-175	AC85-265V	24W	175mm	50-155mm	80-90LM/W	3500K 7000K	>80	Aluminum
OS-BL002-225	AC85-265V	36W	225mm	50-205mm	80-90LM/W	4000K	>80	Aluminum

LED PANEL LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-BL040-90	AC85-265V	6W	Φ 90mm	50-75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-BL040-120	AC85-265V	12W	Φ 120mm	50-100mm	80-90LM/W	5000K 6500K 6500K 8000K	Aluminum
OS-BL040-220	AC85-265V	24W	Φ 220mm	50-200mm	80-90LM/W		Aluminum
OS-BL040-300	AC85-265V	32W	Φ 300mm	50-285mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-PL1806-100	AC85-265V	6W	Φ100mm	100 cut(50-90)mm	80-90LM/W	2700K 5000K 3000K 6500K	>80	Aluminum
OS-PL1806-120	AC85-265V	8W	Φ120mm	118cut(50-105)mm	80-90LM/W	3500K 7000K 4000K	>80	Aluminum
OS-PL1806-175	AC85-265V	15W	Φ175mm	175cut(50-165)mm	80-90LM/W		>80	Aluminum
OS-PL1806-230	AC85-265V	20W	Φ225mm	230cut(50-220)mm	80-90LM/W		>80	Aluminum

LED PANEL LIGHT




3 + 3W

OS-PL055

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |

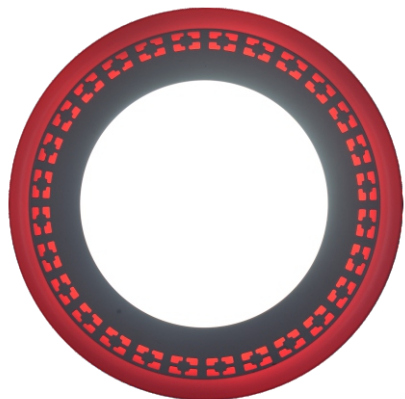


3 + 3W

OS-PL005

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |

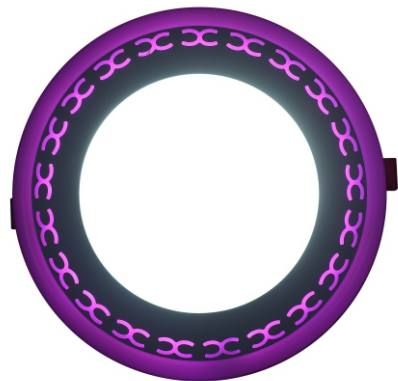

3 + 3W

OS-PL007

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |

LED PANEL LIGHT



3 + 3W

SMC-303

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |



3 + 3W

OS-PFL306

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |



3 + 3W

OS-PFL307

Outside ring color

- | | |
|--|--|
|  Blue |  White |
|  Red |  Yellow |
|  Green |  Pink |
|  Purple |  RGB |
|  RPGB |  PGB |

LED PANEL LIGHT



3+3W

SMC-178

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB



3+3W

OS-PFL006-3

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB



3+3W

OS-737

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB

LED PANEL LIGHT



3+3W

OS-767

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB



3+3W

OS-PFL001

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB



3+3W

OS-PFL002

Outside ring color

- Blue

White
- Red

Yellow
- Green

Pink
- Purple

RGB
- RPGB

PGB

LED PANEL LIGHT



3+3W

OS-PFL003

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |



3+3W

OS-PFL004

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |




3+3W

OS-PFL008

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |

LED PANEL LIGHT

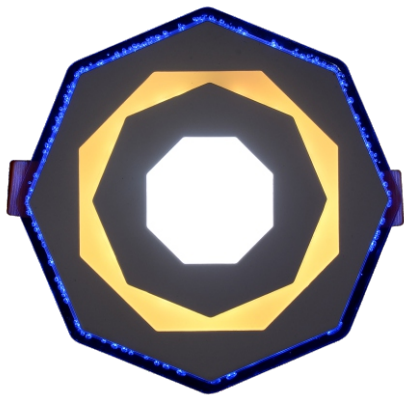

3+3W

OS-PFL305

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |



3+3W

OS-PFL308

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |



3+3W

OS-PFL310

Outside ring color

- | | |
|--------|--------|
| Blue | White |
| Red | Yellow |
| Green | Pink |
| Purple | RGB |
| RPGB | PGB |

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Co or temperature	Material
OS-SL011-1	AC85-265V	1*7W	Φ 92x92mm	Φ 75x75mm	80-90LM/W	2700K 5000K 3000K 6500K	Aluminum
OS-SL011-2	AC85-265V	2*7W	Φ 92x172mm	Φ 75x155mm	80-90LM/W	3500K 8000K 4000K	Aluminum
OS-SL011-3	AC85-265V	3*7W	Φ 92x257mm	Φ 75x220mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS-SL057 WH	AC85-265V	12W	Φ 70mm	80-90LM/W	2700K 5000K 3000K 6500K	Aluminum
OS-SL057 BK	AC85-265V	12W	Φ 70mm	80-90LM/W	3500K 8000K 4000K	Aluminum
OS-SL057 SL	AC85-265V	12W	Φ 70mm	80-90LM/W		Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DX01	AC85-265V	1*7W	Φ 92x92mm	Φ 75x75mm	80-90LM/W	2700K 5000K 3000K 6500K	Aluminum
OS-DX02	AC85-265V	2*7W	Φ 92x172mm	Φ 75x155mm	80-90LM/W	3500K 8000K 4000K	Aluminum
OS-DX03	AC85-265V	3*7W	Φ 92x255mm	Φ 75x220mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SP1D WH	AC85-265V	10W	Φ 70x100mm	Φ 55x75mm	80-90LM/W	2700K 3000K 3500K 4000K	Aluminum
OS-SP1D BK	AC85-265V	10W	Φ 70x100mm	Φ 55x75mm	80-90LM/W	5000K 6500K 8000K	Aluminum
OS-SP2D WH	AC85-265V	20W	Φ 85x160mm	Φ 55x140mm	80-90LM/W		Aluminum
OS-SP2D BK	AC85-265V	20W	Φ 85x160mm	Φ 55x140mm	80-90LM/W		Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Co or temperature	Material
OS-SPXF0019	AC85-265V	1*7W	Φ 92x92mm	Φ 75x75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-SPXF0020	AC85-265V	2*7W	Φ 92x172mm	Φ 75x155mm	80-90LM/W		Aluminum
OS-SPXF0021	AC85-265V	3*7W	Φ 92x257mm	Φ 75x220mm	80-90LM/W		Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-DL098	AC85-265V	1*7W	Φ 92x92mm	Φ 75x75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-DL098	AC85-265V	2*7W	Φ 92x172mm	Φ 75x155mm	80-90LM/W		Aluminum
OS-DL098	AC85-265V	3*7W	Φ 92x255mm	Φ 75x220mm	80-90LM/W		Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-SL089-85	AC85-265V	7W	Φ85*46mm	Φ75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-SL089-108	AC85-265V	10W	Φ108*58mm	Φ95mm	80-90LM/W		> 80	Aluminum
OS-SL089-138	AC85-265V	15W	Φ138*76mm	Φ120mm	80-90LM/W		> 80	Aluminum
OS-SL089-158	AC85-265V	20W	Φ158*78mm	Φ140mm	80-90LM/W		> 80	Aluminum





Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-SL088-85	AC85-265V	7W	Φ90mm	Φ75mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-SL088-108	AC85-265V	9W	Φ100mm	Φ85mm	80-90LM/W		> 80	Aluminum
OS-SL088-138	AC85-265V	12W	Φ130mm	Φ110mm	80-90LM/W		> 80	Aluminum
OS-SL088-158	AC85-265V	18W	Φ170mm	Φ155mm	80-90LM/W		> 80	Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
SMC-671	AC85-265V	10W	Φ 85x80mm	Φ 75x75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
SMC-672	AC85-265V	10W	Φ 82x65mm	Φ 70mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
SMC-673	AC85-265V	10W	Φ 86x45mm	Φ 75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
SMC-674	AC85-265V	7W	Φ 83x50mm	Φ 75mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum

LED SPOT LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-675-7W	AC85-265V	7W	Φ 62x45mm	Φ 55mm	80-90LM/W	2700K 5000K	Aluminum
OS-675-12W	AC85-265V	12W	Φ 80x48mm	Φ 75mm	80-90LM/W	3000K 6500K	Aluminum
OS-675-18W	AC85-265V	18W	Φ 95x49mm	Φ 85mm	80-90LM/W	3500K 8000K 4000K	Aluminum




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
SMC-677	AC85-265V	10W	Φ 82x65mm	Φ 70mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum

LED SPOT LIGHT

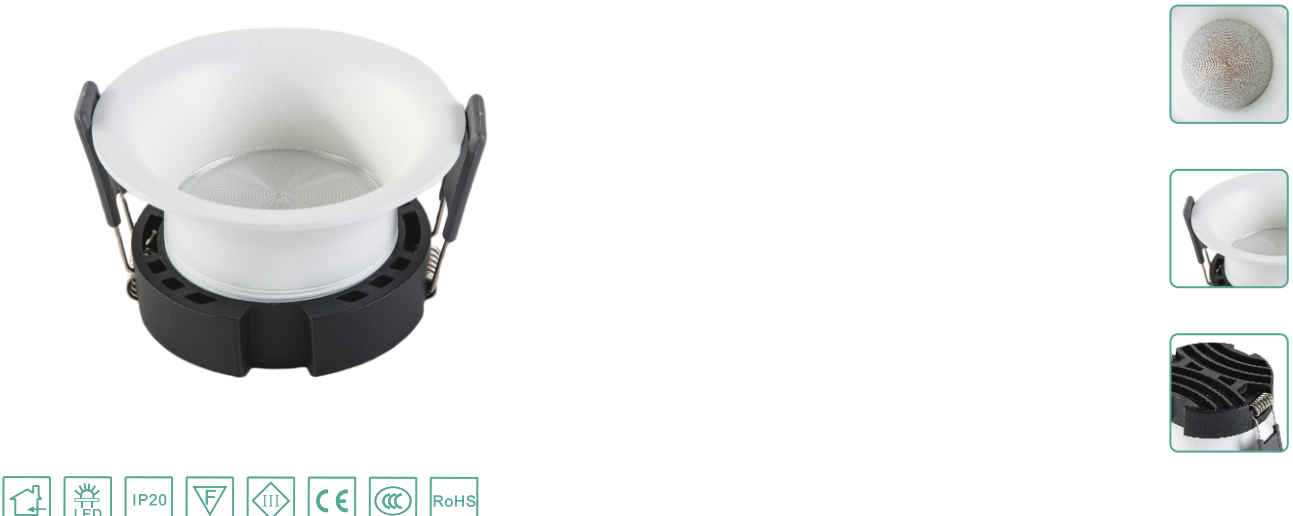

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SL059-62	AC85-265V	7W	Φ 62x82mm	Φ 55mm	80-90LM/W	2700K 5000K	Aluminum
OS-SL059-83	AC85-265V	12W	Φ 83x82mm	Φ 75mm	80-90LM/W	3000K 6500K 3500K 8000K 4000K	Aluminum
OS-SL059-105	AC85-265V	18W	Φ 105x112mm	Φ 95mm	80-90LM/W		Aluminum

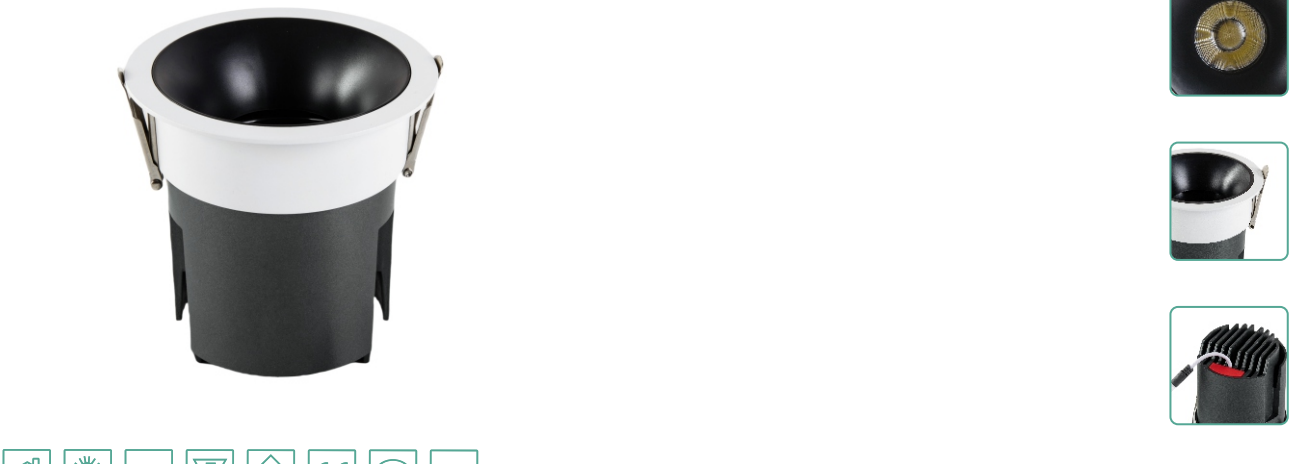

Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SL058-65	AC85-265V	7W	Φ 65x78mm	Φ 55mm	80-90LM/W	2700K 5000K	Aluminum
OS-SL058-84	AC85-265V	10W	Φ 84x88mm	Φ 75mm	80-90LM/W	3000K 6500K 3500K 8000K 4000K	Aluminum
OS-SL058-105	AC85-265V	15W	Φ 105x100mm	Φ 95mm	80-90LM/W		Aluminum

LED SPOT LIGHT



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-SL055-65	AC85-265V	7W	Φ 65xH78mm	Φ 55mm	95LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	> 80	Aluminum
OS-SL055-85	AC85-265V	10W	Φ 85xH84mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL055-85	AC85-265V	12W	Φ 85xH91mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL055-85	AC85-265V	20W	Φ 85xH101mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL055-105	AC85-265V	20W	Φ 105xH111mm	Φ 95mm	95LM/W		> 80	Aluminum
OS-SL055-105	AC85-265V	30W	Φ 105xH121mm	Φ 95mm	95LM/W		> 80	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	Material
OS-SL060-65	AC85-265V	7W	Φ 65x115mm	Φ 55mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Aluminum
OS-SL060-85	AC85-265V	10W	Φ 85x115mm	Φ 75mm	80-90LM/W		Aluminum
OS-SL060-105	AC85-265V	15W	Φ 105x115mm	Φ 95mm	80-90LM/W		Aluminum

LED SPOT LIGHT




Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-SL056-65	AC85-265V	7W	Φ 65xH78mm	Φ 55mm	95LM/W	2700K 3000K 3500K 4000K 5000K 6500K 8000K	> 80	Aluminum
OS-SL056-65	AC85-265V	10W	Φ 65xH89mm	Φ 55mm	95LM/W		> 80	Aluminum
OS-SL056-85	AC85-265V	10W	Φ 85xH92mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL056-85	AC85-265V	12W	Φ 85xH102mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL056-85	AC85-265V	15W	Φ 85xH112mm	Φ 75mm	95LM/W		> 80	Aluminum
OS-SL056-105	AC85-265V	20W	Φ 105xH117mm	Φ 95mm	95LM/W		> 80	Aluminum
OS-SL056-105	AC85-265V	30W	Φ 105xH127mm	Φ 95mm	95LM/W		> 80	Aluminum



Model	Voltage	Power	Size	Hole Size	Light effect	Color temperature	CRI	Material
OS-SL087-65	AC85-265V	9W	Φ65*70mm	Φ55mm	95LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	> 80	Aluminum
OS-SL087-85	AC85-265V	15W	Φ85*90mm	Φ75mm	95LM/W		> 80	Aluminum
OS-SL087-105	AC85-265V	20W	Φ105*100mm	Φ95mm	95LM/W		> 80	Aluminum

UFO HIGH BAYLIGHT



Model	Voltage	Power	Light effect	Color temperature	CRI	Material
OS-UFO002-100W	AC85-265V	100W	100-120LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	>70	Aluminum
OS-UFO002-150W	AC85-265V	150W	100-120LM/W		>70	Aluminum
OS-UFO002-200W	AC85-265V	200W	100-120LM/W		>70	Aluminum



Model	Voltage	Power	Diameter Size	Light effect	Color temperature	CRI	Material
OS-UFO001-100W	AC85-265V	100W	Φ250mm	80-90LM/W	2700K 5000K 3000K 6500K 3500K 8000K 4000K	>80	Aluminum
OS-UFO001-150W	AC85-265V	150W	Φ306mm	80-90LM/W		>80	Aluminum
OS-UFO001-200W	AC85-265V	200W	Φ360mm	80-90LM/W		>80	Aluminum

UFO HIGH BAYLIGHT



Model	Light effect	Power	Voltage	Color temperature	Size
OS-UFO006-100W	100Lm/W	100W	100-277V	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Φ 245mm
OS-UFO006-150W	100Lm/W	150W	100-277V		Φ 285mm
OS-UFO006-200W	100Lm/W	200W	100-277V		Φ 335mm



Model	Light effect	Power	Voltage	Color temperature	Size
OS-UFO007-100W	100Lm/W	100W	100-277V	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Φ 300mm
OS-UFO007-150W	100Lm/W	150W	100-277V		Φ 350mm
OS-UFO007-200W	100Lm/W	200W	100-277V		Φ 400mm

UFO HIGH BAYLIGHT



Model	Voltage	Power	Size	Color temperature	Beam Angle
OS-UFO004-100W	220V	100W	Φ 430xH300mm	6500K	90°
OS-UFO004-150W	220V	150W	Φ 430xH300mm	6500K	90°
OS-UFO004-200W	220V	200W	Φ 500xH320mm	6500K	90°
OS-UFO004-300W	220V	300W	Φ 500xH320mm	6500K	90°



Model	Light effect	Power	Voltage	Color temperature	Size
OS-UFO005-100W	100Lm/W	100W	100-265V	2700K 5000K 3000K 6500K 3500K 8000K 4000K	Φ 260mm
OS-UFO005-150W	100Lm/W	150W	100-265V		Φ 300mm
OS-UFO005-200W	100Lm/W	200W	100-265V		Φ 360mm

LED FLOOD LIGHT



Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-FL8003-100W	AC85-265V	100W	288x243x60mm	80-90LM/W	2700K 3000K	> 80	Aluminum
OS-FL8003-200W	AC85-265V	200W	423x325x75mm	80-90LM/W	3500K 4000K	> 80	Aluminum
OS-FL8003-300W	AC85-265V	300W	460x375x85mm	80-90LM/W	5000K 6500K	> 80	Aluminum
OS-FL8003-500W	AC85-265V	500W	670x375x95mm	80-90LM/W	7000K	> 80	Aluminum




Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-FL024-100W	AC85-265V	100W	288x243x60mm	80-90LM/W	2700K 3000K	> 80	Aluminum
OS-FL024-200W	AC85-265V	200W	423x325x75mm	80-90LM/W	3500K 4000K	> 80	Aluminum
OS-FL024-300W	AC85-265V	300W	460x375x85mm	80-90LM/W	5000K 6500K	> 80	Aluminum
OS-FL024-500W	AC85-265V	500W	670x375x95mm	80-90LM/W	7000K	> 80	Aluminum

LED FLOOD LIGHT



Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-FL020-30W	AC85-265V	30W	190*180*33mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-FL020-50W	AC85-265V	50W	210*200*36mm	80-90LM/W		> 80	Aluminum
OS-FL020-100W	AC85-265V	100W	272*262*36mm	80-90LM/W		> 80	Aluminum
OS-FL020-150W	AC85-265V	150W	310*302*36mm	80-90LM/W		> 80	Aluminum
OS-FL020-200W	AC85-265V	200W	342*331*36mm	80-90LM/W		> 80	Aluminum




Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-FLX-10W	AC85-265V	10W	100*80*32mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-FLX-20W	AC85-265V	20W	118*93*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-30W	AC85-265V	30W	160*120*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-50W	AC85-265V	50W	205*160*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-100W	AC85-265V	100W	270*210*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-150W	AC85-265V	150W	320*230*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-200W	AC85-265V	200W	377*277*32mm	80-90LM/W		> 80	Aluminum
OS-FLX-300W	AC85-265V	300W	438*330*47mm	80-90LM/W		> 80	Aluminum

LED FLOOD LIGHT




Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-8006-50W	AC85-265V	50W	210*175*40mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-8006-100W	AC85-265V	100W	250*205*45mm	80-90LM/W		> 80	Aluminum
OS-8006-150W	AC85-265V	150W	250*205*45mm	80-90LM/W		> 80	Aluminum
OS-8006-200W	AC85-265V	200W	360*300*50mm	80-90LM/W		> 80	Aluminum
OS-8006-300W	AC85-265V	300W	420*340*55mm	80-90LM/W		> 80	Aluminum
OS-8006-400W	AC85-265V	400W	470*370*55mm	80-90LM/W		> 80	Aluminum



Model	Voltage	Power	Size	Light effect	Color temperature	CRI	Material
OS-FL026-50W	AC85-265V	50W	228*192*52mm	80-90LM/W	2700K 3000K 3500K 4000K 5000K 6500K 7000K	> 80	Aluminum
OS-FL026-100W	AC85-265V	100W	288*243*60mm	80-90LM/W		> 80	Aluminum
OS-FL026-150W	AC85-265V	150W	350*284*70mm	80-90LM/W		> 80	Aluminum
OS-FL026-200W	AC85-265V	200W	423*325*75mm	80-90LM/W		> 80	Aluminum
OS-FL026-300W	AC85-265V	300W	460*375*75mm	80-90LM/W		> 80	Aluminum
OS-FL026-400W	AC85-265V	400W	565*382*75mm	80-90LM/W		> 80	Aluminum
OS-FL026-500W	AC85-265V	500W	670*378*82mm	80-90LM/W		> 80	Aluminum

LED STREET LIGHT

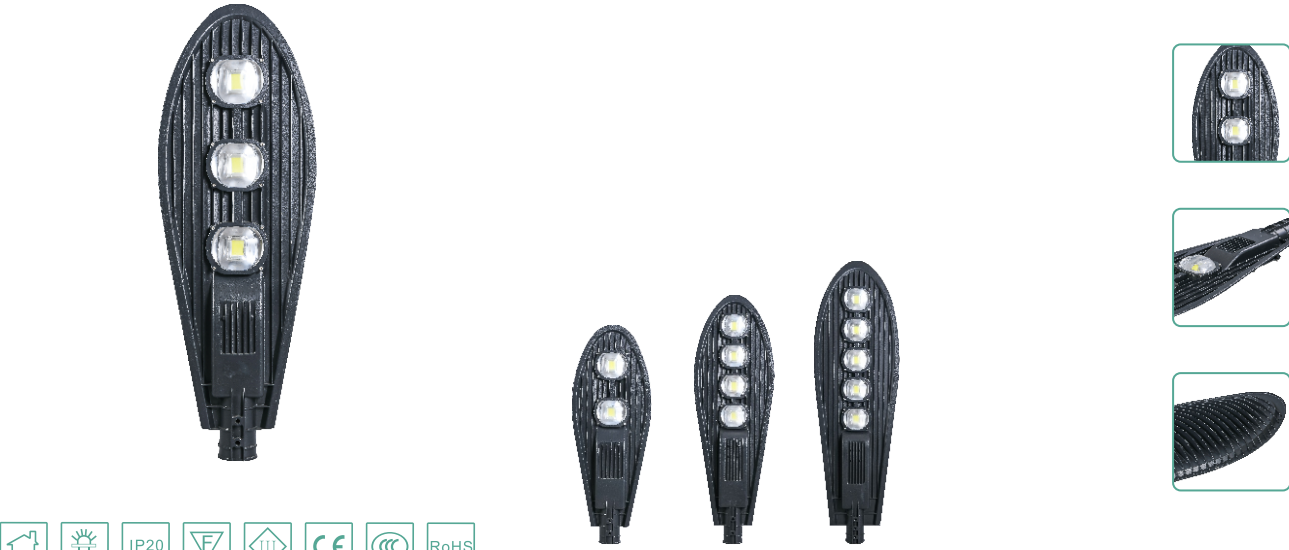


Model	Voltage	Power	Light effect	Color temperature	CRI	Material
OS-ST001-50W	AC85-265V	50W	70LM/W	2700K	>70	Aluminum
OS-ST001-100W	AC85-265V	100W	70LM/W	3000K	>70	Aluminum
OS-ST001-150W	AC85-265V	150W	70LM/W	3500K	>70	Aluminum
OS-ST001-200W	AC85-265V	200W	70LM/W	4000K	>70	Aluminum
OS-ST001-250W	AC85-265V	250W	70LM/W	5000K	>70	Aluminum
				6500K	>70	Aluminum
				7000K	>70	Aluminum



Model	Voltage	Power	Light effect	Color temperature	CRI	Material
OS-ST008-100W	AC85-265V	100W	100-120LM/W		>70	Aluminum
OS-ST008-150W	AC85-265V	150W	100-120LM/W	2700K	>70	Aluminum
OS-ST008-200W	AC85-265V	200W	100-120LM/W	3000K	>70	Aluminum
OS-ST008-250W	AC85-265V	250W	100-120LM/W	3500K	>70	Aluminum
OS-ST008-300W	AC85-265V	300W	100-120LM/W	4000K	>70	Aluminum
OS-ST008-350W	AC85-265V	350W	100-120LM/W	5000K	>70	Aluminum
				6500K	>70	Aluminum
				7000K	>70	Aluminum

LED STREET LIGHT

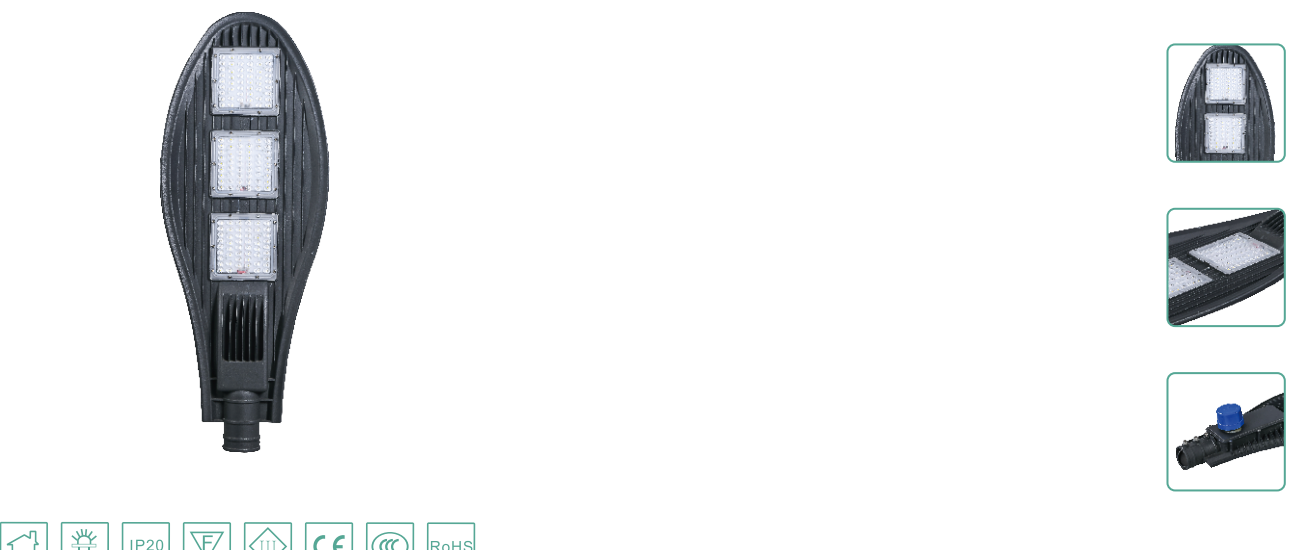

Model	Voltage	Power	Light effect	Color temperature	CRI	Material
OS-ST001-SMD-50W	AC85-265V	50W	100-120LM/W	2700K	>70	Aluminum
OS-ST001-SMD-100W	AC85-265V	100W	100-120LM/W	3000K	>70	Aluminum
OS-ST001-SMD-150W	AC85-265V	150W	100-120LM/W	3500K	>70	Aluminum
OS-ST001-SMD-200W	AC85-265V	200W	100-120LM/W	4000K	>70	Aluminum
				5000K	>70	Aluminum
				6500K	>70	Aluminum
				7000K	>70	Aluminum



Model	Voltage	Power	Light effect	Color temperature	CRI	Material
AL-009 / SMC-0010	AC85-265V	50W	100-120LM/W	2700K	>70	Aluminum
AL-009 / SMC-0010	AC85-265V	100W	100-120LM/W	3000K	>70	Aluminum
AL-009 / SMC-0010	AC85-265V	180W	100-120LM/W	3500K	>70	Aluminum
AL-009 / SMC-0010	AC85-265V	240W	100-120LM/W	4000K	>70	Aluminum
				5000K	>70	Aluminum
				6500K	>70	Aluminum
				7000K	>70	Aluminum

MAGNETIC TRACK LIGHT



Model	OS-GL044	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°



Model	OS-GL045	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°

MAGNETIC TRACK LIGHT



Model	OS-GL046	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°



Model	OS-GL047	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°



Model	OS-GL048	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°



Model	OS-GL049	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°



Model	OS-GL150	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	20W/30W/50W	Material	Aluminum
Surface Color	Black/White	Beam Angle	24°

MAGNETIC TRACK LIGHT



S.M.C

MAGNETIC TRACK

Model	OS30-1M/OS30-2M/OS30-3M	Size	30x5mm
Voltage	DC48V	Length	1m/2m/3m
Color	Black/White	Material	Iron+olycarbonate+copper

MAGNETIC TRACK LIGHT



S.M.C



Model	OS752-FD5	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	10W	Material	Aluminum+Plastic
Size	140x35x105mm	Beam Angle	30°



Model	OS752-FD10	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	12W	Material	Aluminum+Plastic
Size	270x35x105mm	Beam Angle	30°



Model	OS752-FD10D	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	12W	Material	Aluminum+Plastic
Size	270x35x105mm	Beam Angle	105°



Model	OS754-TL7	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	7W	Material	Aluminum+Plastic
Size	ø36x90x145mm	Beam Angle	24°



Model	OS754-TL12	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	12W	Material	Aluminum+Plastic
Size	ø48x150x205mm	Beam Angle	24°

MAGNETIC TRACK LIGHT





Model	OS755-DR54R	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	7W	Material	Aluminum+Plastic
Size	ø54x63x98mm	Beam Angle	24°



Model	OS759-TS7	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	7W	Material	Aluminum+Plastic
Size	ø105x120mm	Beam Angle	24°



Model	OS-758-TML7	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	7W	Material	Aluminum
Size	ø85x35x105mm	Beam Angle	24°



Model	OS-757-TM7	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	7W	Material	Aluminum
Size	ø85x50x120mm	Beam Angle	100°



Model	OS30-SP100/200	Light effect	80-90Lm/W
Voltage	AC180-255V	Output	DC48V 2.1A/4.2A(Max)
Power	100W/200W	Material	Aluminum
Size	32x31x220mm 32x31x280mm	Surface Color	Black/White

MAGNETIC TRACK LIGHT







Model	OS760-DFT345/690	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	10W	Material	Plastic
Size	ø26x345mm ø26x685mm	Beam Angle	180°





Model	OS756-FT500/1000/1500	Light effect	80-90Lm/W
Voltage	DC48V	Color	3000K/4000K/6500K
Power	10W	Material	Silicone
Size	22x500/1000/1500mm	Beam Angle	360°





Straight connect module


In&Out connect module


L connect module


T connect module


Cross connect module





Model	Item No	Size	Material	Surface Color
OS30-Connect Module	Straight connect module	30x30x5mm	PVC&Copper	Black/White
OS30-Connect Module	In&Out connect module	25x25x30mm	PVC&Copper	Black/White
OS30-Connect Module	L connect module	45x45x5mm	PVC&Copper	Black/White
OS30-Connect Module	T connect module	60x45x5mm	PVC&Copper	Black/White
OS30-Connect Module	Cross connect module	60x60x5mm	PVC&Copper	Black/White

MAGNETIC TRACK LIGHT




Model	Voltage	Power	Size	Light effect	Color temperature	Material	Beam Angle
OS751-LB24	DC48V	10W	240x32x11mm	80-90LM/W	3000K	Aluminum+Plastic	30°
OS751-LB48	DC48V	20W	468x32x11mm	80-90LM/W	4000K 6500K	Aluminum+Plastic	30°



Model	Voltage	Power	Size	Light effect	Color temperature	Material
OS750-DF300	DC48V	12W	300x32x11mm	80-90LM/W	3000K	Aluminum+Plastic
OS750-DF600	DC48V	24W	600x32x11mm	80-90LM/W	4000K	Aluminum+Plastic
OS750-DF900	DC48V	36W	900x32x11mm	80-90LM/W	6500K	Aluminum+Plastic
OS750-DF1200	DC48V	48W	1200x32x11mm	80-90LM/W		Aluminum+Plastic

MAGNETIC TRACK LIGHT



NATURAL
CLOSE

Warm white Light

LED POWER SUPPLY



LED POWER SUPPLY



Model	Power	Size	Input Current	Output Current	AC Input	DC Output
100W-24V	100W	122x50x24.3mm	0.75A Max	4.0A Max	AC85-265V 50/60Hz	DC 24V
200W-24V	200W	178x50x24.3mm	1.0A Max	7.5A Max	AC85-265V 50/60Hz	DC 24V
300W-24V	300W	196x50x24.3mm	1.5A Max	11.5A Max	AC85-265V 50/60Hz	DC 24V
400W-24V	400W	238x50x24.3mm	2.0A Max	15.0A Max	AC85-265V 50/60Hz	DC 24V



Model	Power	Size	Input Current	Output Current	AC Input	DC Output
R-60W-24V	60W	122x50x24.3mm	0.5A Max	2.5A Max	AC180-265V 50/60Hz	DC 24V
R-100W-24V	100W	140x50x24.3mm	0.75A Max	4.0A Max	AC180-265V 50/60Hz	DC 24V
R-200W-24V	200W	178x50x24.3mm	1.0A Max	7.5A Max	AC180-265V 50/60Hz	DC 24V
R-300W-24V	300W	195x50x24.3mm	1.5A Max	11.5A Max	AC180-265V 50/60Hz	DC 24V
R-400W-24V	400W	235x50x24.3mm	2.0A Max	15.0A Max	AC180-265V 50/60Hz	DC 24V
R-500W-24V	500W	240x60x30mm	2.5A Max	18.75A Max	AC180-265V 50/60Hz	DC 24V

LINEAR LIGHTING

ALUMINUM PROFILE



Model: **XT-400** White
Size:28x10mm

28
18
20
10

Model: **XT-447** White
Size:42x10mm

42
27
30
10

Model: **XT-665** White
Size:28x10mm

28
18
20
10

Model: **XT-378** White
Size:42x10mm

42
27
30
10

Model: **XT-400** Black
Size:28x10mm

28
18
20
10

Model: **XT-447** Black
Size:42x10mm

42
27
30
10

Model: **XT-665** Black
Size:28x10mm

28
18
20
10

Model: **XT-378** Black
Size:42x10mm

42
27
30
10

Model: **XT-400** Silver
Size:28x10mm

28
18
20
10

Model: **XT-447** Silver
Size:42x10mm

42
27
30
10

Model: **XT-665** Silver
Size:28x10mm

28
18
20
10

Model: **XT-378** Silver
Size:42x10mm

42
27
30
10

Model: **XT-400** Silver
Size:28x10mm

28
18
20
10

Model: **XT-447** Silver
Size:42x10mm

42
27
30
10

Model: **XT-385** Black
Size:20x10mm

20
10

Model: **XT-385** Silver
Size:20x10mm

20
10

Model: **XT-400** Gold
Size:28x10mm

28
18
20
10

Model: **XT-447** Gold
Size:42x10mm

42
27
30
10

Model: **XT-446** Black
Size:30x10mm

30
28
10

Model: **XT-446** Silver
Size:30x10mm

30
28
10

Model: **XT-798** White
Size:65x10mm

65
47
50
10

Model: **XT-798** Silver
Size:65x10mm

65
47
50
10

Model: **XT-1035** Black
Size:25x10mm

25
18
17
10

Model: **XT-1035** Silver
Size:25x10mm

25
18
20
10

LED BULKHEAD LIGHT



MODEL NO: FC0008
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0009
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC001
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0013
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0014
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC002
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0017
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC015
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC103
MATERIAL: PLASTIC
POWER: 24W
IP: 54

LED BULKHEAD LIGHT



MODEL NO: FC111
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC112
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC221
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC212
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0011
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0013
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0010
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC0910
MATERIAL: PLASTIC
POWER: 24W
IP: 54



MODEL NO: FC907
MATERIAL: PLASTIC
POWER: 24W
IP: 54

LED A-SHAPE BULB



Specification

- Power: 3W/5W/7W/9W/12W/15W/18W/22W
- Size : A45/A50/A60/A60/A65/A70/A80/A95
- LED: SMD 2835
- Lumen: 100LM/W
- CRI: 80Ra
- Color: White/ warm white
- Lamp base: B22/E27

LED T-SHAPE BULB



Specification

- Power: 5W/10W/15W/20W/30W/40W/50W
- Size:T50/T60/T70/T80/T100/T115/T125/T135
- LED: SMD 2835
- Lumen: 100LM/W
- CRI: 80Ra
- Color: White/ warm white
- Lamp base: B22/E27

LED STICKER BULB



Specification

- Power: 5W/10W/15W/20W
- Size:T32/T37/T45/T50
- LED: SMD 2835
- Lumen: 90LM/W
- CRI: 80Ra
- Color: White/ warm white
- Lamp base: B22/E27



Specification

- Power: 5W/10W/15W/20W
- Size:T32/T37/T45/T50
- LED: SMD 2835
- Lumen: 90LM/W
- CRI: 80Ra
- Color: White/ warm white
- Lamp base: B22/E27

LED SPOT LIGHT



Specification

- Power: 5W/7W/9W
- Size:50*55MM/50*65MM
- LED: SMD 2835
- Lumen: 90LM/W
- CRI: 80Ra
- Color: White/ warm white
- Lamp base: MR16/GU10/GU5.3



Specification

- Power: 7W
- Size:50*25MM
- LED: SMD 2835
- Lumen: 90LM/W
- CRI: 80Ra
- Color: White/ warm white

